



Válečková ložiska

Dvouřadá válečková ložiska

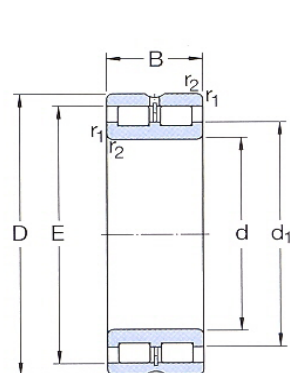

NNCL

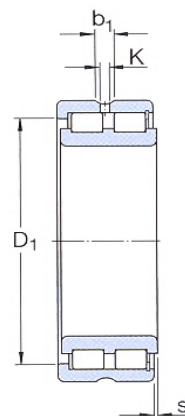

NNSF




NNC

d 25 - 85 mm

Označení	Rozměry			Dynamická únosnost C (kN)	Statická únosnost Co (kN)	Mezní únavové zatížení Pu (kN)	Přípustné otáčky		Hmot- nost (kg)
	d (mm)	D (mm)	B (mm)				mazaní tukem (1/min)	mazaní olejem (1/min)	
NN 3005	25	47	16	26	30	3,1	22000	18000	0,12
NN 3005 K	25	47	16	26	30	3,1	22000	18000	0,12
NN 3006 KTN	30	55	19	30,8	37,5	3,9	18000	15000	0,19
NN 3006 TN	30	55	19	30,8	37,5	3,9	18000	15000	0,19
NN 3007 KTN	35	62	20	39,1	50	5,4	16000	13000	0,25
NN 3007 TN	35	62	20	39,1	50	5,4	16000	13000	0,25
NN 3008 KTN	40	68	21	42,9	56	6,48	14000	12000	0,30
NN 3008 TN	40	68	21	42,9	56	6,48	14000	12000	0,30
NN 3009 KTN	45	75	23	50,1	65,5	7,65	13000	11000	0,38
NN 3009 TN	45	75	23	50,1	65,5	7,65	13000	11000	0,38
NN 3010 KTN	50	80	23	52,8	73,5	8,5	12000	9500	0,42
NN 3010 TN	50	80	23	52,8	73,5	8,5	12000	9500	0,42
NN 3011 KTN	55	90	26	69,3	96,5	11,6	11000	8500	0,62
NN 3011 TN	55	90	26	69,3	96,5	11,6	11000	8500	0,62
NN 3012 KTN	60	95	26	73,7	106	12,7	10000	8000	0,66
NN 3012 TN	60	95	26	73,7	106	12,7	10000	8000	0,66
NN 3013 KTN	65	100	26	76,5	116	13,7	9500	7500	0,71
NN 3013 TN	65	100	26	76,5	116	13,7	9500	7500	0,71
NN 3014 KTN	70	110	30	96,8	150	17,3	8500	7000	1,00
NN 3014 TN	70	110	30	96,8	150	17,3	8500	7000	1,00
NN 3015 KTN	75	115	30	96,8	150	17,6	8000	6700	1,10
NN 3015 TN	75	115	30	96,8	150	17,6	8000	6700	1,10
NN 3016 KTN	80	125	34	119	186	22	7500	6000	1,50
NN 3016 TN	80	125	34	119	186	22	7500	6000	1,45
NN 3017 KTN9	85	130	34	125	204	23,2	7000	6000	1,55

Válečková ložiska

Dvouřadá válečková ložiska

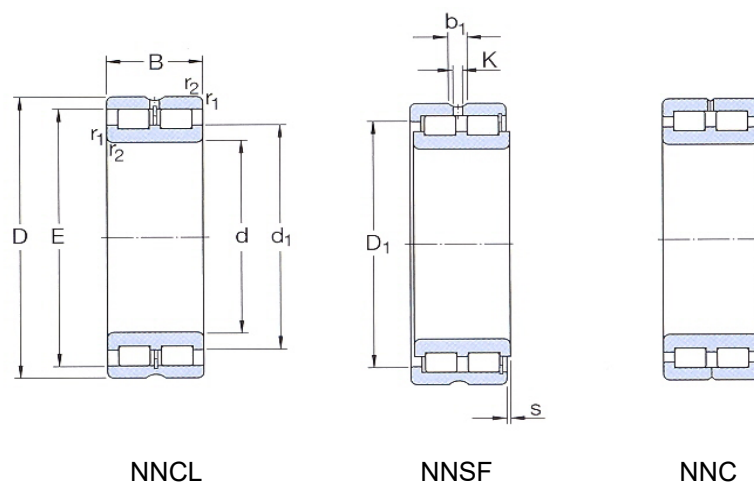

NNCL

NNSF


NNC

d 85 - 120 mm

Označení	Rozměry			Dynamická únosnost C (kN)	Statická únosnost Co (kN)	Mezní únarové zatížení Pu (kN)	Přípustné otáčky		Hmot- nost (kg)
	d (mm)	D (mm)	B (mm)				mazaní tukem (1/min)	mazaní olejem (1/min)	
NN 3017 TN9	85	130	34	125	204	23,2	7000	6000	1,60
NN 3018 KTN9	90	140	37	138	216	26	6700	5300	1,95
NN 3018 TN9	90	140	37	138	216	26	6700	5300	2,00
NN 3019 KTN9	95	145	37	142	232	27,5	6300	5300	2,05
NN 3019 TN9	95	145	37	142	232	27,5	6300	5300	2,10
NNU 4920 B/W33	100	140	40	128	255	29	6300	5300	1,90
NNU 4920 BK/W33	100	140	40	128	255	29	6300	5300	1,80
NN 3020 KTN9	100	150	37	151	250	29	6000	5000	2,10
NN 3020 TN9	100	150	37	151	250	29	6000	5000	2,20
NNU 4120 K30M/W33	100	165	65	358	570	71	3600	4800	5,50
NNU 4120 M/W33	100	165	65	358	570	71	3600	4800	5,50
NNU 4921 B/W33	105	145	40	130	260	29	6000	5000	2,00
NNU 4921 BK/W33	105	145	40	130	260	29	6000	5000	1,90
NN 3021 KTN9	105	160	41	190	305	36	5600	4800	2,70
NN 3021 TN9	105	160	41	190	305	36	5600	4800	2,80
NNU 4121 K30M/W33	105	175	69	413	670	80	3400	4300	6,70
NNU 4121 M/W33	105	175	69	413	670	80	3400	4300	6,70
NNU 4922 B/W33	110	150	40	132	270	30	6000	4800	2,05
NNU 4922 BK/W33	110	150	40	132	270	30	6000	4800	1,95
NN 3022 KTN9	110	170	45	220	360	41,5	5300	4500	3,40
NN 3022 TN9	110	170	45	220	360	41,5	5300	4500	3,55
NNU 4122 K30M/W33	110	180	69	418	710	83	3200	4300	6,95
NNU 4122 M/W33	110	180	69	418	710	83	3200	4300	6,95
NNU 4924 B/W33	120	165	45	176	340	37,5	5300	4300	2,80
NNU 4924 BK/W33	120	165	45	176	340	37,5	5300	4300	2,65

Válečková ložiska

Dvouřadá válečková ložiska

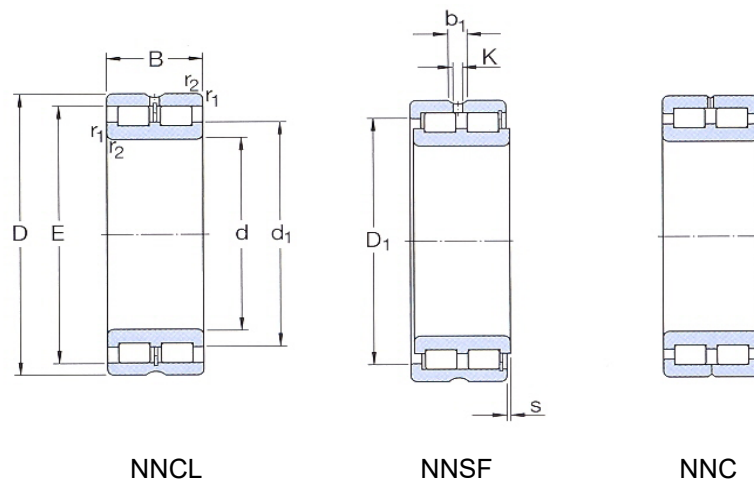

NNCL

NNSF

NNC

d 120 - 160 mm									
Označení	d	Rozměry		Dynamická únosnost	Statická únosnost	Mezní únavové zatížení	Přípustné otáčky		Hmotnost
	(mm)	D (mm)	B (mm)	C (kN)	Co (kN)	PU (kN)	mazání tukem (1/min)	mazání olejem (1/min)	(kg)
NN 3024 KTN9	120	180	46	229	390	44	5000	4000	3,70
NN 3024 TN9	120	180	46	229	390	44	5000	4000	3,85
NNU 4124 K30M/W33	120	200	80	523	865	100	3000	3800	11,0
NNU 4124 M/W33	120	200	80	523	865	100	3000	3800	11,0
NNU 4926 B/W33	130	180	50	187	390	41,5	4800	4000	3,85
NNU 4926 BK/W33	130	180	50	187	390	41,5	4800	4000	3,65
NN 3026 KTN9	130	200	52	286	475	53	4500	3800	5,55
NN 3026 TN9	130	200	52	286	475	53	4500	3800	5,75
NNU 4126 K30M/W33	130	210	80	561	965	110	2800	3600	10,7
NNU 4126 M/W33	130	210	80	561	965	110	2800	3600	10,7
NNU 4928 B/W33	140	190	50	190	400	41,5	4500	3800	4,10
NNU 4928 BK/W33	140	190	50	190	400	41,5	4500	3800	3,90
NN 3028 K/W33	140	210	53	297	520	56	4300	3600	6,00
NN 3028/W33	140	210	53	297	520	56	4300	3600	6,20
NNU 4128 K30M/W33	140	225	85	627	1040	118	2600	3400	13,0
NNU 4128 M/W33	140	225	85	627	1040	118	2600	3400	13,0
NNU 4930 B/W33	150	210	60	330	655	71	4300	3400	6,25
NNU 4930 BK/W33	150	210	60	330	655	71	4300	3400	6,15
NN 3030 K/W33	150	225	56	330	570	62	4000	3200	7,30
NN 3030/W33	150	225	56	330	570	62	4000	3200	7,50
NNU 4130 K30M/W33	150	250	100	748	1290	143	2400	3000	18,0
NNU 4130 M/W33	150	250	100	748	1290	143	2400	3000	18,0
NNU 4932 B/W33	160	220	60	330	680	72	4000	3200	6,60
NNU 4932 BK/W33	160	220	60	330	680	72	4000	3200	6,30
NN 3032 K/W33	160	240	60	369	655	69,5	3800	3000	8,80