


Hřídelové spojky

Spojky GH, TRASCO GR

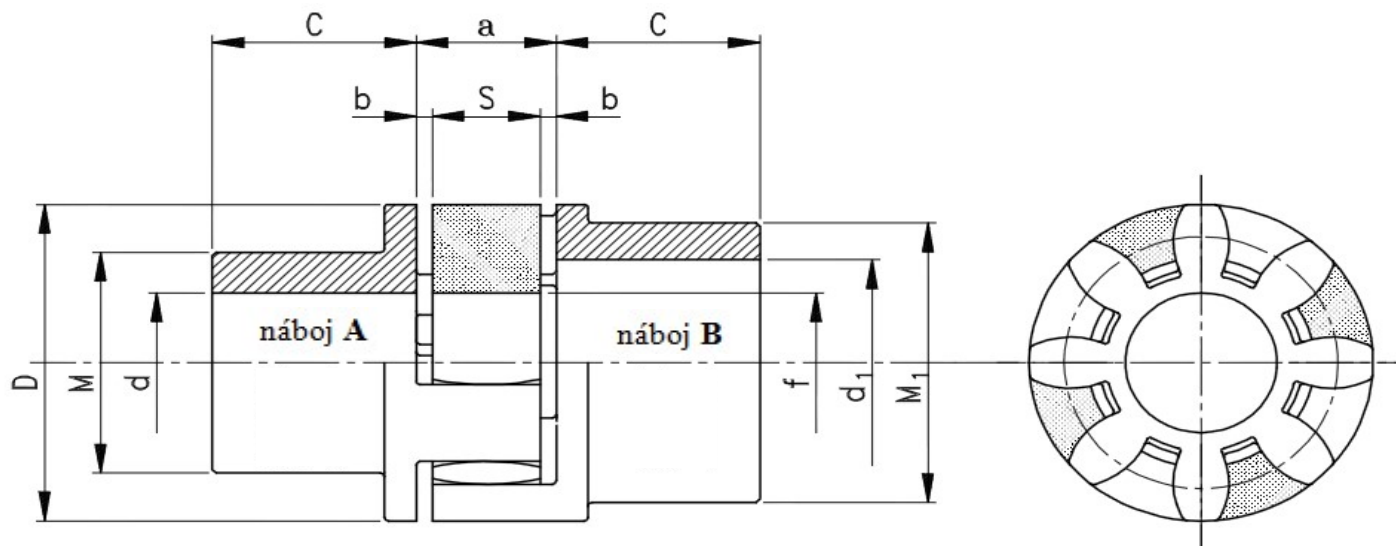

TRASCO GR														
Označení	Kroucí moment $M_{k\max}$ (Nm)	Otáčky n (1/min)	Rozměry (mm)											
			D	a	b	S	f	M	M_1	d	d_1	C		
												A/B	AL	BL
19/24	23	14000	40	16	2	12	18	-	40	-	24	25	-	50
24/32	80	10600	55	18	2	14	27	40	55	24	32	30	50	60
28/38	230	8500	65	20	2,5	15	30	48	65	28	38	35	60	80
38/45	450	7100	80	24	3	18	38	66	80	38	45	45	80	110
42/55	620	6000	95	26	3	20	46	75	95	42	55	50	110	110
48/60	720	5600	105	28	3,5	21	51	85	105	48	60	56	110	140
55/70	860	4750	120	30	4	22	60	98	120	55	70	65	110	140
65/75	1050	4250	135	35	4,5	26	68	115	135	65	75	75	140	140
75/90	2500	3550	160	40	5	30	80	135	160	75	90	85	140	170
90/100	6100	2800	200	45	5,5	34	100	160	180	90	100	100	170	210


Pozn.

Spojky se standardně dodávají s plným nábojem bez otvoru

L - prodloužená verze náboje

Hřídelové spojky

Spojky SPIDERFLEX

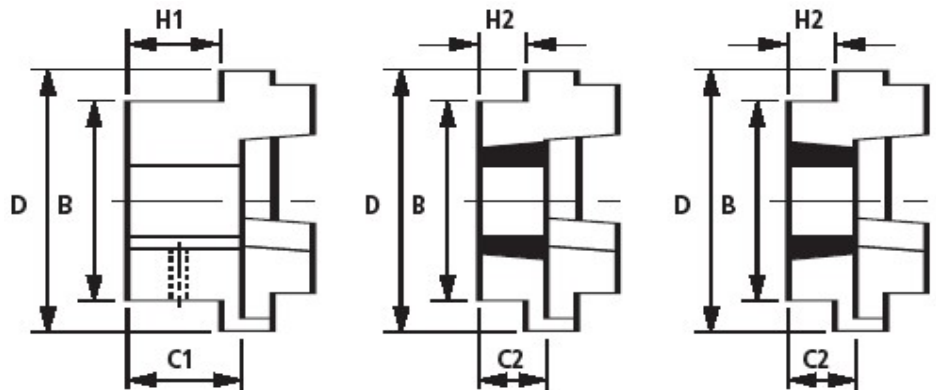

Typ B

Typ F

Typ H

SPIDERFLEX														
Označení	Kroucí moment M_k (Nm)	Max. otáčky n (1/min)	Rozměry (mm)									celková délka spojky		
			B	C1	C2	D	E	F	G	H1	H2	BB	FF, FH HH	FB, HB
RSC70	32	7700	61	23,5	23,5	69	31	18,0	25,0	20	20,0	65	65	65
RSC90	80	6300	70	30,0	23,5	85	32	22,5	30,5	26	19,5	83	70	77
RSC110	160	5000	100	45,0	26,5	112	45	29,0	45,0	37	18,5	119	82	101
RSC130	315	4100	105	55,5	26,5	139	50	36,0	53,0	47	18,0	147	89	118
RSC150	600	3600	115	60,0	33,5	150	62	40,0	60,0	50	23,5	160	107	134
RSC180	950	3000	125	70,0	46,5	180	77	49,0	73,0	58	34,5	189	142	166
RSC230	2000	2600	155	90,0	52,5	225	99	59,5	85,5	77	39,5	240	164	202
RSC280	3150	2200	206	105,5	66,5	275	119	74,5	105,5	90	51,0	285	207	246

Způsob označení spojky:

